






NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

**PLUG MARKING:**

| REVISION INFORMATION |           |             |                   |
|----------------------|-----------|-------------|-------------------|
| Rev.                 | Rev. Date | Modified By | Brief Description |
|                      |           |             |                   |

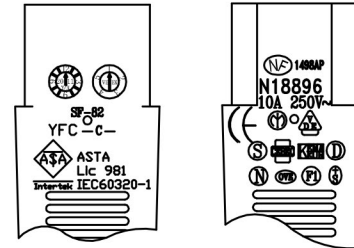

△ 1830±20

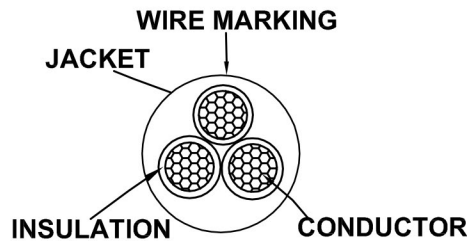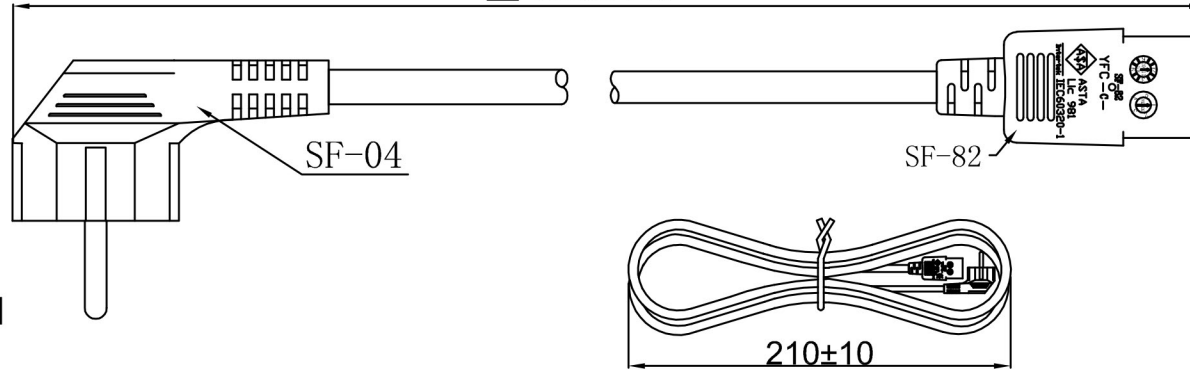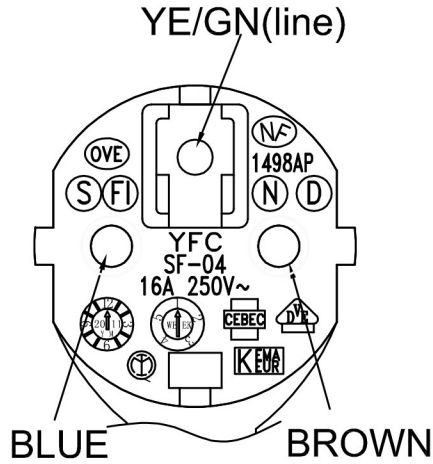

| <b>WIRE MARKING:</b><br>(Hollow)   | + S + S + S KEMA-KEUR (OVE) (S) (N) (D) (FI) △ CECEC 972 <VDE> NF-USE 1345<br>IEMMEQU H05VV-F 3G0.75MM <sup>2</sup> V-75 300/500V ORDINARY DUTY NSW17436 YFC BON-EAGLE |            |           |               |           |           |                  |
|--|--|------------|-----------|---------------|-----------|-----------|------------------|
| Conductor  |  | Insulation |           |               | Jacket    |           | Overall diameter |
| mm <sup>2</sup>  | Resistance maximum (≤)   | Min.Thick  | Diameter  | Length of Lay | Min.Thick | AVG.Thick |                  |
| 0.75<br>(24/0.190)   | at20°C≤26.0ohms/km   | 0.44mm     | 2.4±0.1mm | 130↓mm        | 0.58mm    | 0.8mm     | 6.8±0.1mm        |
| (NOTE: IF THE CONDUCTORS O.D IS GO BEYOND THE SCOPE, THE RESISTANCE OF CONDUCTOR IS STANDARD THEN) |  |            |           |               |           |           |                  |

**ELECTRIC TESTING:**

1. 100% OPEN & SHORT TESTING .
2. VOLTAGE RATING:AC ≥1500V/S
3. PLUG(SF-04) RATED POWER:250V 10A
4. PLUG(SF-82) RATED POWER:250V 10A
5. WIRE: H05VV-F 3X0.75 RATED POWER:300/500V
- 6.COLOR:BLACK

|                   |  |  |                     |  |  |          |
|-------------------|--|--|---------------------|--|--|----------|
| DRAWN BY:DHY      |  |  | DATE:<br>2012/04/18 |  | DESCRIPTION:<br>H05VV-F 3X0.75 SF-04+SF-82 |          |
| CHECKED BY:wuxiao |  |  | SHEET 1 of 1        |  | ITEM NO. 210103BK                          |          |
| APPROVED BY       |  |  | SCALE 1:1           |  | REV. 00                                    | UNIT: mm |

