


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD


REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
A/0	2016/4/26	Susam	NEW

△ LENGTH

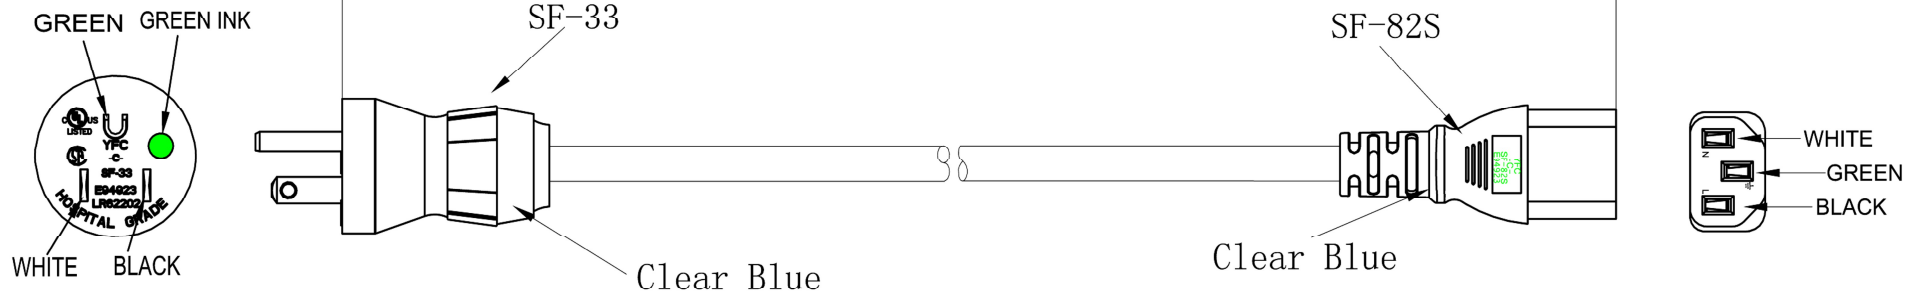

conductor resistance: 14.688 ohms/km at 25°C

WIRE MARKING

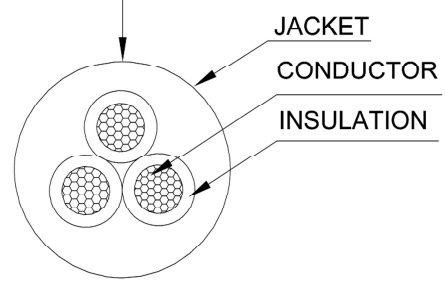

item	color	length(ft)	tolerance(ft)	length(mm)	tolerance(mm)
210240CB	Clear Blue	3	0.05/-0.03	914	15/-10
210241CB	Clear Blue	6	±0.07	1829	±20
210242CB	Clear Blue	10	±0.10	3048	±30
210243CB	Clear Blue	15	±0.10	4572	±30

WIRE MARKING
(Hollow)
NO. 8

(UL) E135710-F3 SJT 3X16AWG 60°C 300V VW-1 CSA LL95737
SJT 3X1.31mm2(16AWG) 60°C 300V FT2 YFC-BONEAGLE

REMARKS:

- 1.PLUG(SF-33) RATED POWER:125V 13A
- 2.CONNECTOR(SF-82S) RATED POWER:125V 13A
- 3.WIRE: SJT 3X16AWG 60°C RATED VOLTAGE:300V
- 4.DVW TEST:1500V,1S
- 5.POLARIZATION AND CONTINUITY TEST
- 6.COMPLY WITH UL817 STANDARD
- 7.CABLE COLOR: GY

My Cable Mart

DRAWN BY Susam	DATE: 2016/4/26	DESCRIPTION: SF-33+SF-82S SJT 3X16AWG 60°C
CHECKED BY QinRao	SHEET 1 of 1	ITEM NO.
APPROVED BY	SCALE 1:1	REV. 00
UNIT: mm		