



NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
A/0	2015.11.19	LM	NEW
A/1	2021.03.18	Arvin	Add "Plug Size" "Wire printing" "Operating temperature"

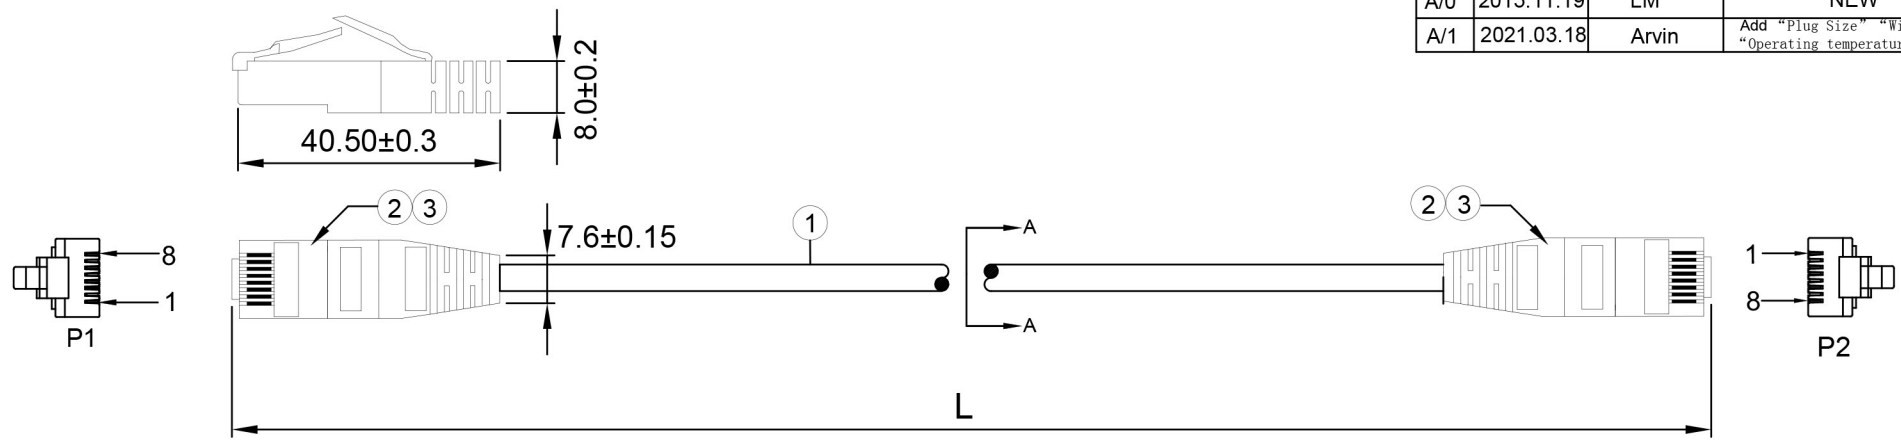

INK MARKING <BY0021>: CAT.6 U/UTP 28AWGX4P PATCH CONFORM TO ANSI/TIA-568.2-D & ISO/IEC 11801

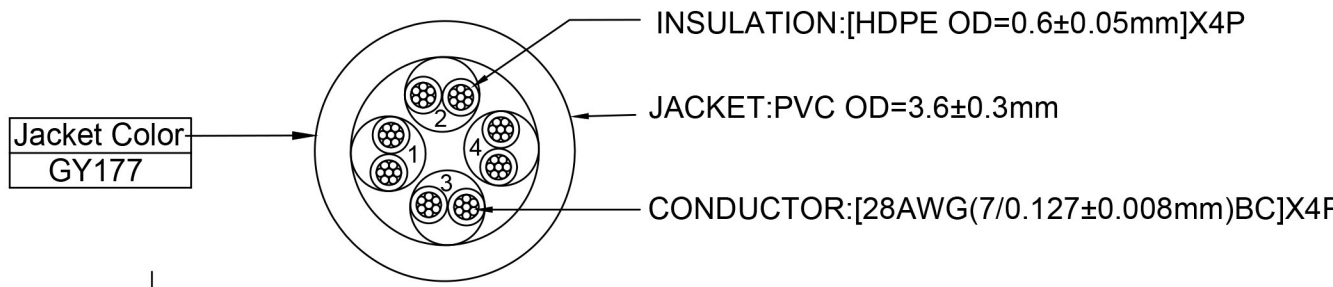

Operation Temperature:-20°C~+60°C

orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

SEC:A-A

PINOUT		
P1	WIRE	P2
1	WHITE/ORANGE	1
2	ORANGE	2
3	WHITE/GREEN	3
5	WHITE/BLUE	5
4	BLUE	4
7	WHITE/BROWN	7
8	BROWN	8

L(ft)	T(inch)	T(%)	L(ft)	T(inch)	T(%)
0.5	±0.6	10%	6	±1.2	1.67%
1	±1.2	10%	7	±2	2.38%
1.5	±1.2	6.67%	8	±2	2.08%
2	±1.2	5%	9	±2	1.85%
3	±1.2	3.33%	10	±2	1.67%
4	±1.2	2.5%	12	±2	1.39%
5	±1.2	2%	15	±3.15	1.75%

MY CABLE MART

DRAWN BY Arvin	DATE: 2021.03.18	DESCRIPTION: C6 SLIM UTP(W/O Cross) 28AWG 4P PVC CMH Molding GY177
CHECKED BY YB	SHEET 1of1	ITEM NO. 10018XXX 10019XXX
APPROVED BY CQ	SCALE 1:1	REV. 01 UNIT:mm

QTY	SPECIFICATION	ITEM	NO.
③	PVC Transparent	BOOT	2
②	8P8C 50U RJ45	PLUG	2
①	CAT.6 UTP 28AWG*4P PVC GY177	CABLE	A/R