



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD.


| REVISION INFORMATION | | | |
|----------------------|-----------|-------------|-------------------|
| Rev. | Rev. Date | Modified By | Brief Description |
| | | | |

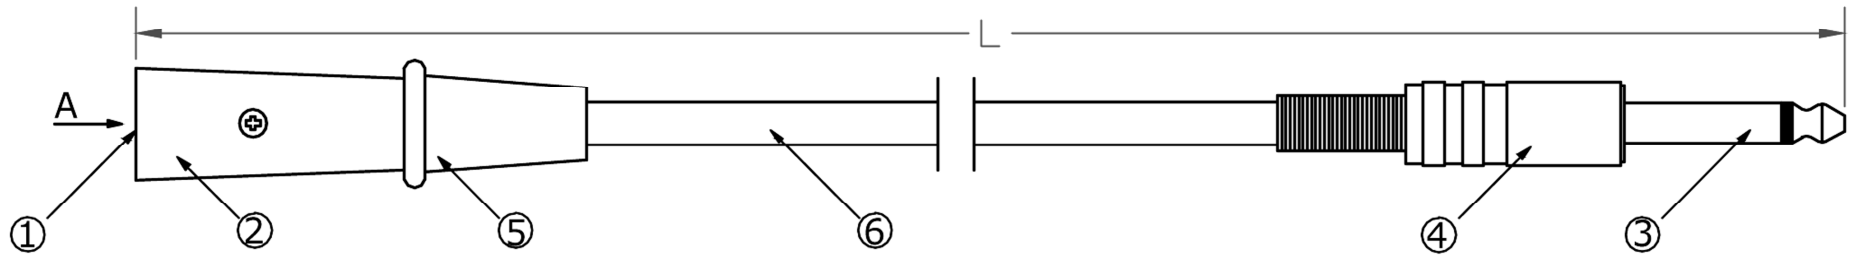

A Side View



CONNECTION

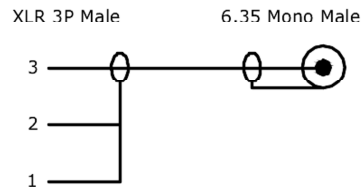

| LINK NO. | PART NO. | LENGTH(L) |
|----------|----------|-----------------|
| 203111 | | 6Ft 1830±50 |
| 203112 | | 10Ft 3050±80 |
| 203113 | | 15Ft 4570±80 |
| 203114 | | 25Ft 7620±80 |
| 203115 | | 50Ft 15240±100 |
| 203117 | | 100Ft 30480±150 |

ELECTRICAL TESTING

1. CONDUCTOR RESISTANCE: ≤5Ω 300V DC

My Cable Mart, LLC

| | | |
|-------------|---------------------|-----------------------------------------------------|
| DRAWN BY | DATE: 2013/06/01 | DESCRIPTION: XLR 3P M 1/4" Mono Microphone Cable |
| CHECKED BY | SHEET 1 of 1 | ITEM NO. 203111 |
| APPROVED BY | SCALE 1:1 | REV. 00 UNIT: mm |

| ⑥ | Cable | Cable (15/0.12) with 28/0.10 Sprial OD.: 6 Black PVC Jacket | 1 | PC |
|-----|----------------|-------------------------------------------------------------|------|------|
| ⑤ | PVC | PVC Black | 1 | PC |
| ④ | Shell | Metal-Nickel Plated | 1 | PC |
| ③ | 6.35 MONO Male | 6.35 MONO Male-Nickel Plated | 1 | PC |
| ② | Shell | Metal-Nickel Plated | 1 | PC |
| ① | XLR 3P Male | XLR 3P Male | 1 | PC |
| NO. | PART NAME | SPECIFICATION DESCRIPTION | Q'TY | UNIT |