
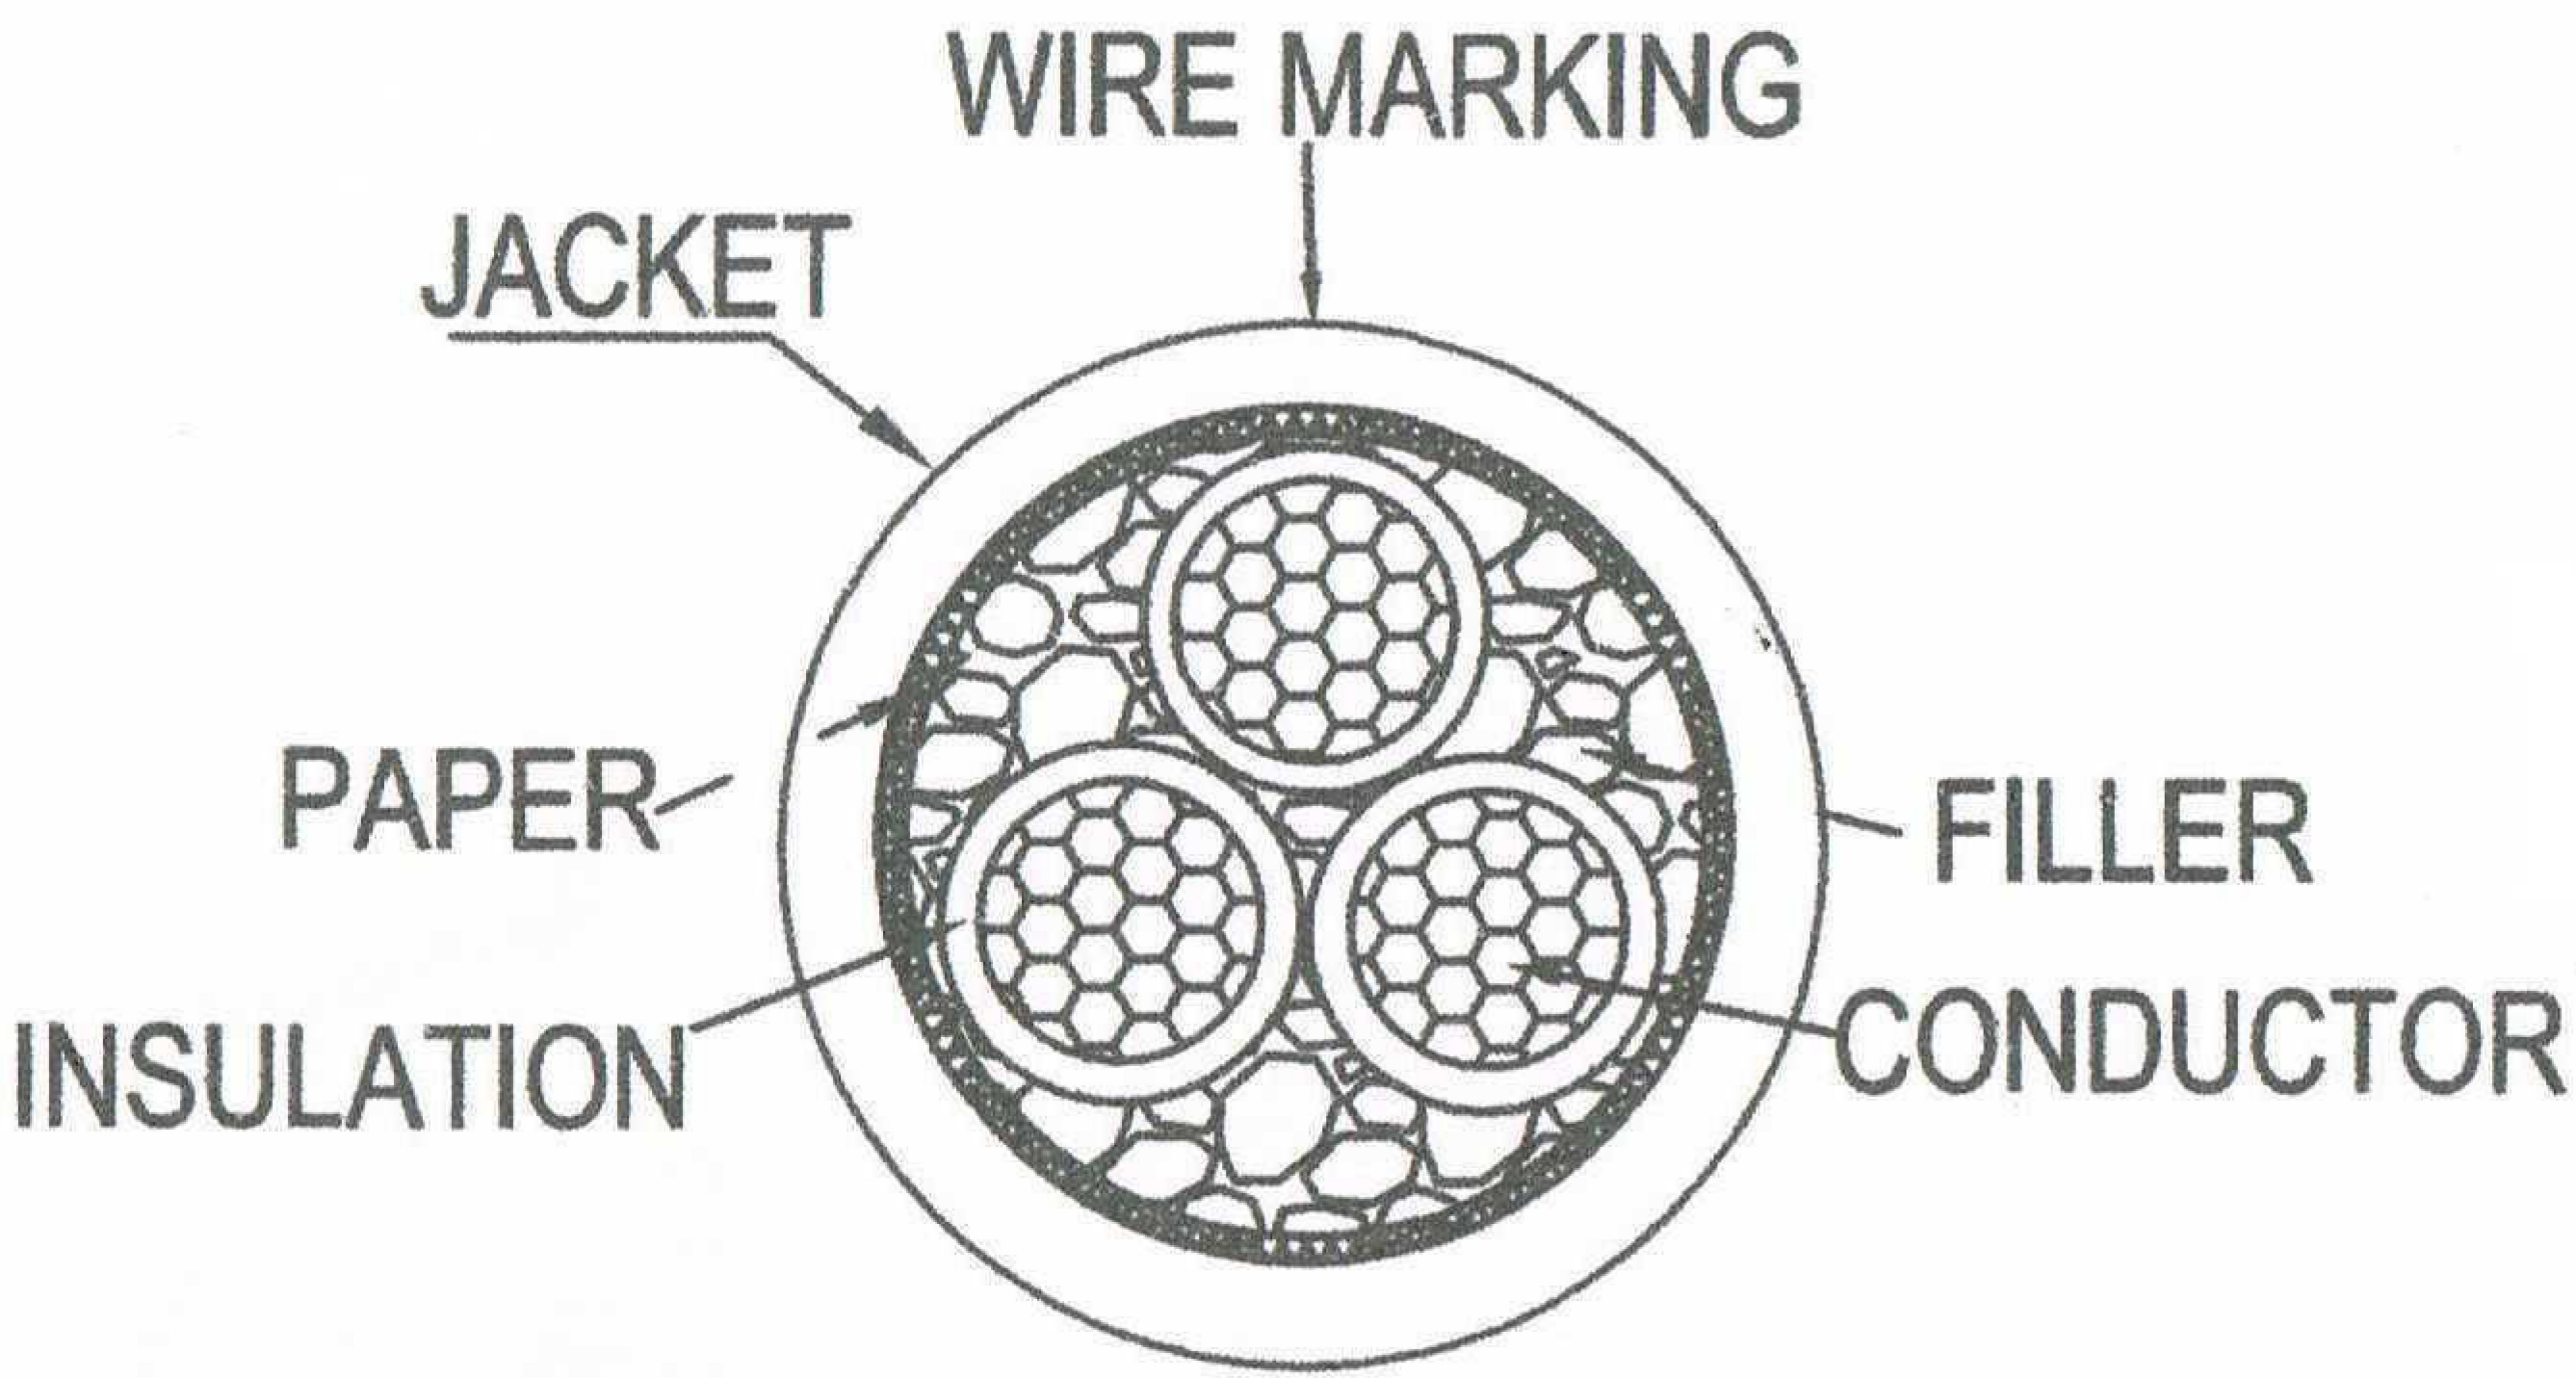


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

| Rev. | Rev. Date  | Modified By | Brief Description |
|------|------------|-------------|-------------------|
|      | 2016-01-18 | zhang       | Mark Cable        |

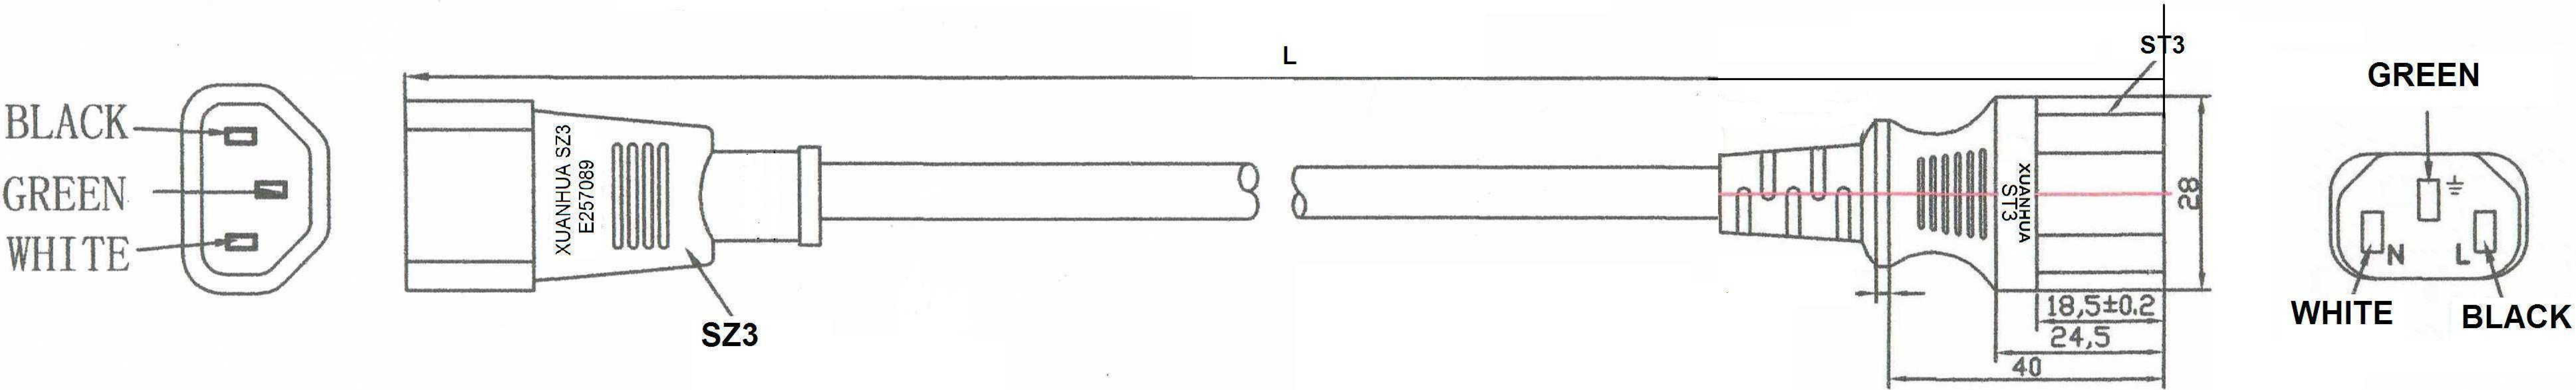

|                                                                                                    |                                        |                                                                                                     |           |  |           |           |                  |
|----------------------------------------------------------------------------------------------------|----------------------------------------|-----------------------------------------------------------------------------------------------------|-----------|--|-----------|-----------|------------------|
| WIRE MARKING:<br>(Hollow)                                                                          |                                        | UL c(UL) SVT 3C 18AWG(0.824mm <sup>2</sup> ) 60C VW-1<br>300V E313867 100030-765 FT1 NINGBO XUANHUA |           |  |           |           |                  |
| Conductor                                                                                          |                                        | Insulation                                                                                          |           |  | Jacket    |           | Overall diameter |
| AWG                                                                                                | Resistance maximum<br>( ≤ )            | Min.Thick                                                                                           | Diameter  |  | Min.Thick | AVG.Thick |                  |
| 18#<br>41/0.16                                                                                     | at20℃≤22.4ohms/km<br>at25℃≤22.8ohms/km | 0.33mm                                                                                              | 2.0±0.1mm |  | 0.61mm    | 0.76mm    | 6.2+-0.15mm      |
| (NOTE: IF THE CONDUCTORS O.D IS GO BEYOND THE SCOPE, THE RESISTANCE OF CONDUCTOR IS STANDARD THEN) |                                        |                                                                                                     |           |  |           |           |                  |

ELECTRIC TESTING:

- 1.100% OPEN&SHORT TESTING
- 2.VOLTAGE RATING:AC $\geq$ 1500V/S
- 3.PLUG(XH202)RATED POWER:  
125V 10A UL-E257089
- 4.PLUG(XH006A)RATED POWER:  
125V 10A UL-257089
- 5.WIRE:SVT 18/3 RATED POWER PVC
- 6.COLOR: BLACK

| Item No  | Lenth (ft) | T (inche)  |
|----------|------------|------------|
| 210148BK | 1          | $\pm$ 0.79 |
| 210149BK | 3          | $\pm$ 0.79 |
| 210102BK | 6          | $\pm$ 0.79 |
| 210150BK | 10         | $\pm$ 0.79 |
|          |            |            |
|          |            |            |

My Cable Mart, LLC

|                   |                     |                                                              |          |  |
|-------------------|---------------------|--------------------------------------------------------------|----------|--|
| DRAWN BY: FENG    | DATE:<br>2016/01/16 | DESCRIPTION:<br>Power Extension Cord C13 to C14 BLK SVT 18/3 |          |  |
| CHECKED BY: ZHANG | SHEET 1 of 1        | ITEM NO.                                                     |          |  |
| APPROVED BY       | SCALE               | REV. 00                                                      | UNIT: mm |  |