



P1

P2

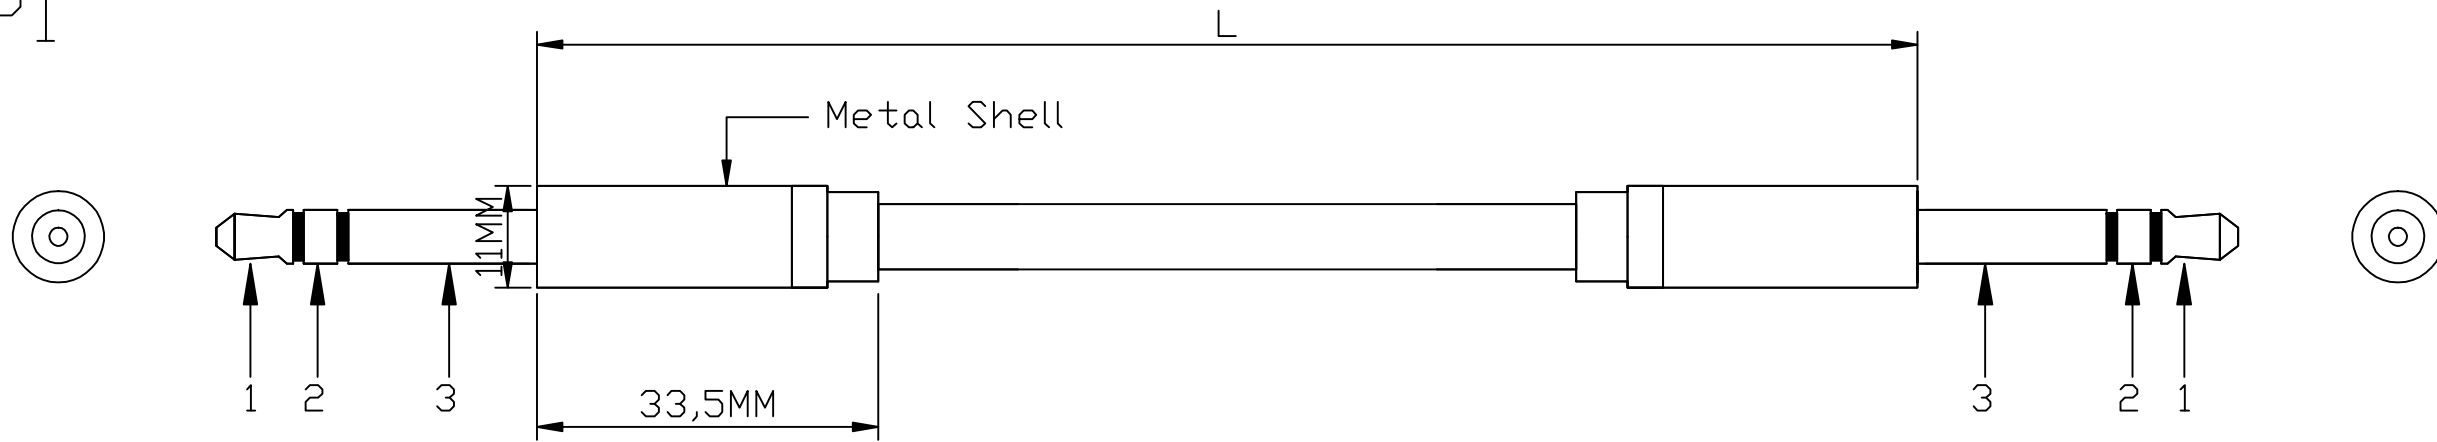

PIN ASSIGNMENT:

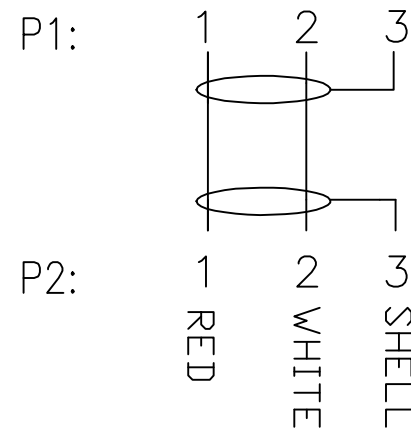

NOTES:

1. 100% OPEN & SHORT TESTING
2. VOL TAGE:300V DC
3. INSULATION RESISTANCE:20M ohm

CUSTOMER P/N	length
FE-14TRS-06MM	6<FT>1830MM ± 30MM
FE-14TRS-10MM	10<FT>3050MM ± 50MM
FE-14TRS-15MM	15<FT>4570MM ± 80MM
FE-14TRS-25MM	25<FT>7620MM ± 100MM
FE-14TRS-50MM	50<FT>15240MM ± 150MM
FE-14TRS-100MM	100<FT>304800MM ± 200MM

NO.	Material	Description
8		
7		
6		
5		
4	Black PVC	
3	Metal Shell	
2	1/4" STEREO (TRS) MALE (GOLD PLATED)	
1	18AWG(41/0.16BC)*2C+AL+B(128/0.1BC) OD:6.5mm BLACK PVC(90Pa) JACKET	

MY CABLE MART LLC

Title: 1/4" STEREO TRS PHONO CABLE			
Customer: MY CABLE MART LLC	Page: 1/1	Drawn BY: CLR	
Customer P/N:	REV: A	Check BY: DYH	
Date: 2017.12.12	Drawing NO.: FVM402	Unit: mm	Appd BY: