


PIN ASSIGNMENT:

P1:	1	2	3
P2:	1	2	3

NOTES:

- 1.100% OPEN & SHORT TESTING
- 2.VOLTAGE:300V DC
- 3.INSULATION RESISTANCE:20M ohm
- 4.CONTACT RESISTANCE:1 ohm

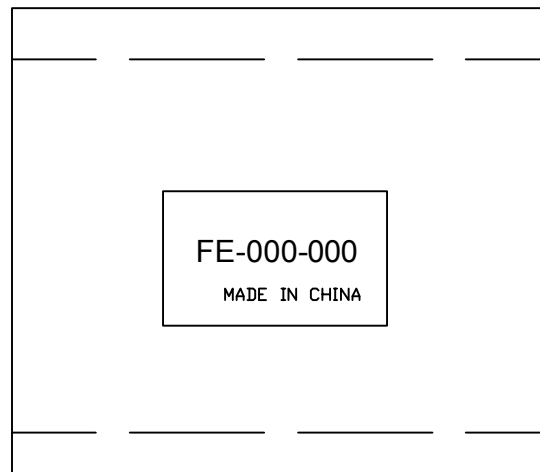

CUSTOMER P/N	length
FE-3MMPM-6INMF	6(IN)150MM ± 20MM
FE-3MMPM-01MF	1.5(FT)450MM ± 30MM
FE-3MMPM-03MF	3(FT)905MM ± 30MM
FE-3MMPM-06MF	6(FT)1830MM ± 50MM
FE-3MMPM-10MF	10(FT)3050MM ± 50MM
FE-3MMPM-15MF	15(FT)4570MM ± 80MM

NO.	Material	Description
8		
7		
6		
5		
4	PCV45Pa BLACK	
3	3.5MM TRS MALE	
2		3.5MM TRS Panel-Mount JACK (NUT:M6)
1		28AWG(7/0.12CCS)*3C OD: 3.0mm BLACK JACKET

MY CABLE MART LLC

Title: 3.5mm TRS Male to Female Panel-Mount			
Customer: MY CABLE MART LLC	Page: 1/1	Drawn BY: CLR	
Customer P/N:	REV: A	Check BY: DYH	
Date: 2019.10.18	Drawing NO.:	Unit: mm	Appd BY: