


PIN ASSIGNMENT:

P1:	1	2	3	4
P2:	1	2	3	4

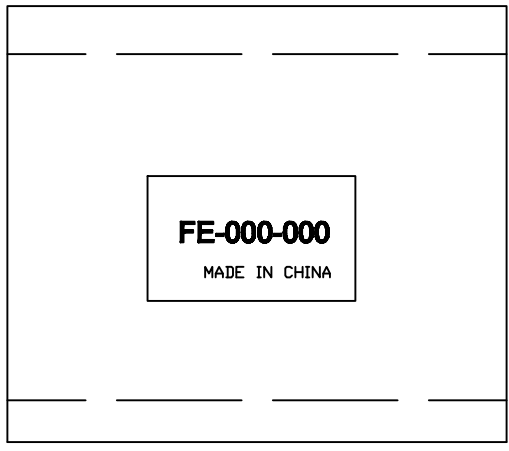

NOTES:

- 1.100% OPEN & SHORT TESTING
- 2.VOLTAGE:300V DC
- 3.INSULATION RESISTANCE:20M ohm
- 4.CONTACT RESISTANCE:1 ohm

CUSTOMER P/N	length
FE-4CTPM-6IN	6(IN)150MM ± 20MM
FE-4CTPM-01	1.5(FT)450MM ± 30MM
FE-4CTPM-02	2(FT)605MM ± 30MM
FE-4CTPM-03	3(FT)910MM ± 30MM
FE-4CTPM-06	6(FT)1830MM ± 50MM
FE-4CTPM-10	10(FT)3050MM ± 50MM
FE-4CTPM-15	15(FT)4570MM ± 100MM

NO.	Material	Description
8		
7		
6		
5		
4		PCV45Pa BLACK
3		3.5MM TRRS Panel-Mount JACK(MUT:M6)
2		3.5MM TRRS PLUG
1		28AWG(7/0.12BC)*4C OD: 3.0mm BLACK JACKET

MY CABLE MART CABLE

Title: 3.5MM TRRS Panel-Mount CABLE			
Customer: MY CABLE MART LLC		Page: 1/1	Drawn BY: CLR
Customer P/N:		REV: A	Check BY: DYH
Date: 2015.12.11	Drawing NO.:	Unit: mm	Appd BY: