


PIN OUT:

| | | | | | | | | | |
|----|---|---|---|---|---|---|---|---|---|
| P1 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | G |
| P2 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | G |
| P3 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | G |

NOTES:

1. 100% OPEN & SHORT TESTING
2. VOLTAGE: 300V DC
3. INSULATION RESISTANCE: 20M ohm
4. CONTACT RESISTANCE: 1ohm

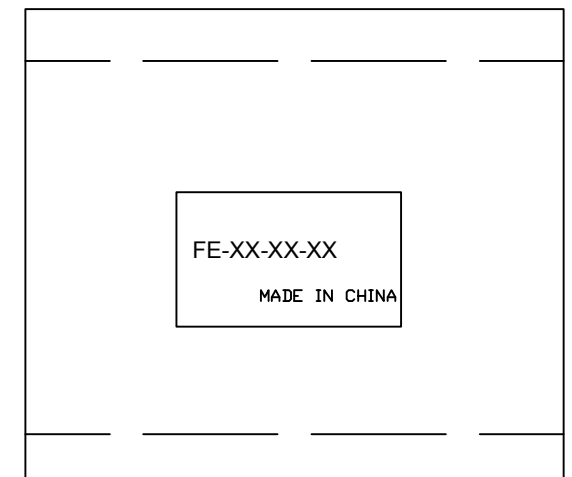

| | | |
|-----|----------|----------------------|
| 8 | | |
| 7 | | |
| 6 | | |
| 5 | | |
| 4 | | PE BAG+LABEL |
| 3 | | PCV45Pa BLACK |
| 2 | | RJ45 FEMALE SHIELDED |
| 1 | | RJ45 PCB |
| NO. | Material | Description |

MY CABLE MART LLC

| | | | |
|-------------------------------|---------------------|-----------|---------------|
| Title: RJ45 ADAPTER | | | |
| Customer: MY CABLE MART LLC | | Page: 1/1 | Drawn BY: CLR |
| Customer P/N: FE-ADT-345 | | REV: A1 | Check BY: DYH |
| Date: 2021.08.15 | Drawing NO.: FLAD03 | Unit: mm | Appd BY: |