



**RoHS Compliant**




- FE-DPHH-8IN 8IN (200+/-20MM)
- FE-DPHH-01 1.5FT (450+/-30MM)
- FE-DPHH-06 6FT (1830+/-50MM)
- FE-DP-HH-10 10FT (3050+/-50MM)
- FE-DPHH-15 15FT (4570+/-80MM)

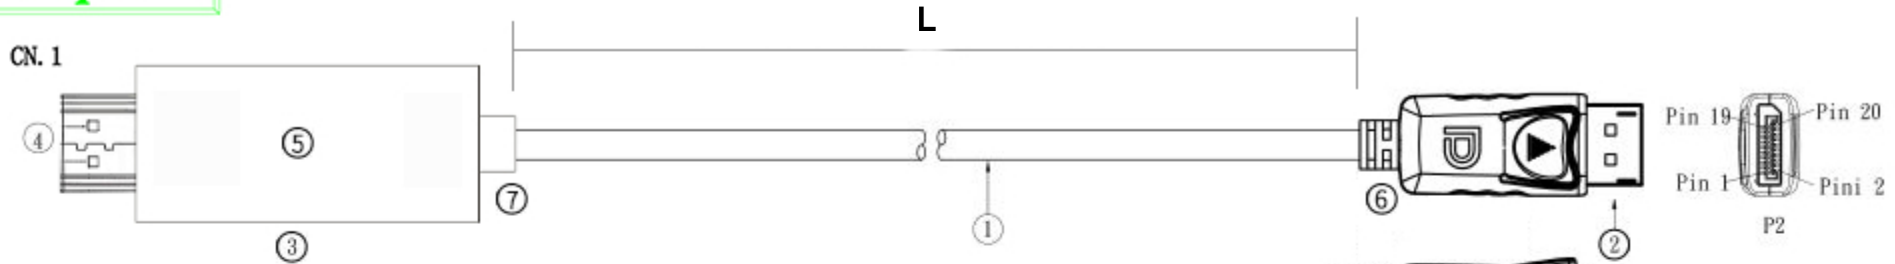

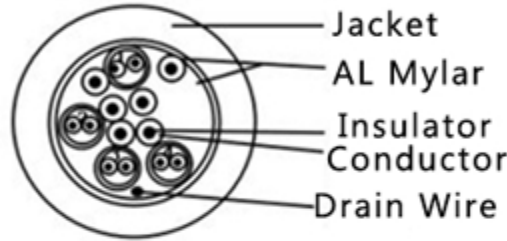

Electrical performance test ing: ( DP F To HDMI F )

- 1.signal source resolution UXGA:3840\*2160p 1920\*1080p
- 2.refresh rate: 30HZ
- 3.the video is like no signal jitter,drag, shadow, Lack of color, etc.
- 4.test the length of both ends of the transition line 450MM/MAX.

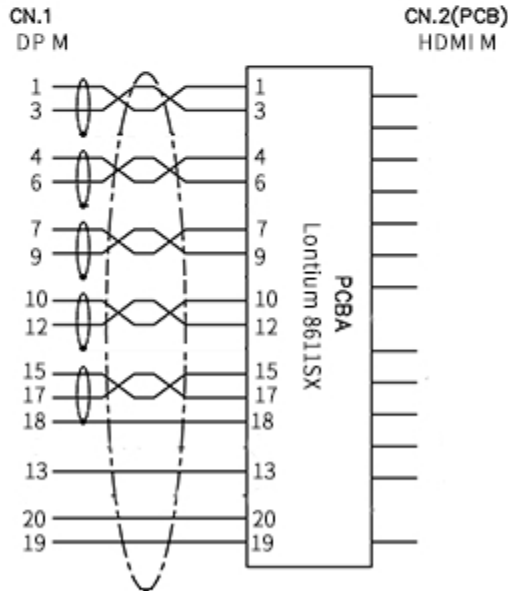PIN ASSIGNMENT:



7	Out Mould	45P PVC black	
6	PE	LDPE (ROHS)	
5	Housing	HDMI F by injection moulding black	
4	Housing	DP M by injection moulding black	
3	CONN	HDMI M gold connector balck shell +PCBA	
2	CONN	DP M gold connector balck plastic core	
1	CABLE	(1*32#+AL)*4+6C*32#+D+AL	
NO.	PART NAME	SPEC DESCRIPTION	REMAKE

INNERMOLD		TOLERANCE UNSPECIFIED	<b>MY CABLE MART LLC</b>		
		± 0.1 ± 0.38 ± ANGLE ±			
OVERMOLD		DRAWN:	SCALE	UNIT	
		DESIGNER:	NON	mm	
		CHECKED:	NAME		SHEET
		APPROVED:	DRAWING NO.		1/1
				REV	
				HDMI	
				1.2	