


PIN ASSIGNMENT:

P1:	1	2
P2:	1	2

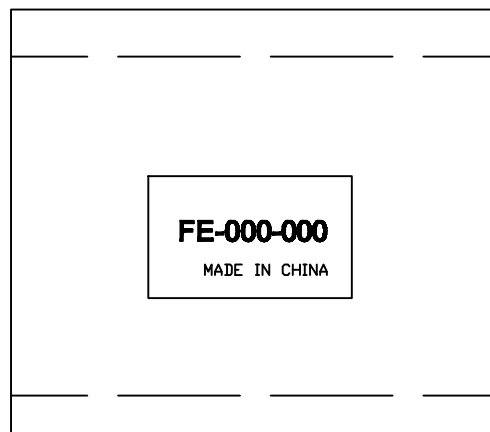

NOTES:

- 1.100% OPEN & SHORT TESTING
2. VOLTAGE: 300V DC
3. INSULATION RESISTANCE: 20M ohm
4. CONTACT RESISTANCE: 1 ohm

CUSTOMER P/N	length
FE-MONOPM-6IN	6(IN)150MM ± 20MM
FE-MONOPM-01	1.5(FT)450MM ± 30MM
FE-MONOPM-02	2(FT)605MM ± 30MM
FE-MONOPM-03	3(FT)910MM ± 30MM
FE-MONOPM-06	6(FT)1830MM ± 50MM
FE-MONOPM-10	10(FT)3050MM ± 50MM
FE-MONOPM-15	15(FT)4570MM ± 100MM

NO.	Material	Description
8		
7		
6		
5		
4	PCV45Pa BLACK	
3	3.5MM TS Panel-Mount JACK(MUT:M6)	
2	3.5MM TS PLUG	
1	28AWG(7/0.12CCS)*2C OD:3.0mm BLACK JACKET	

**MY CABLE MART CABLE**

Title: <b>3.5MM TS Panel-Mount CABLE</b>			
Customer: MY CABLE MART LLC	Page: 1/1	Drawn BY: CLR	
Customer P/N:	REV: A	Check BY: DYH	
Date: 2015.12.11	Drawing NO.:	Unit: mm	Appd BY: