
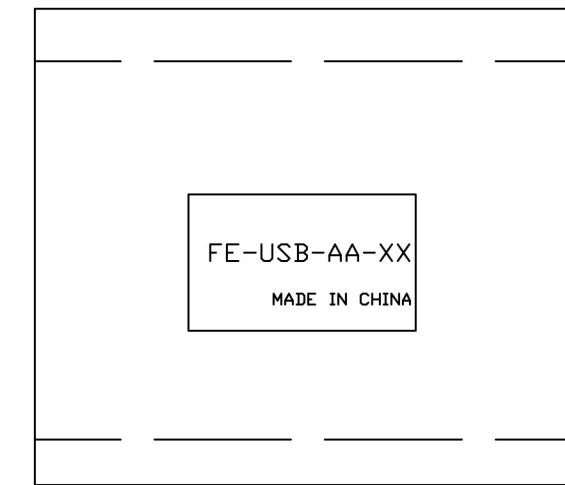


PIN ASSIGNMENT:

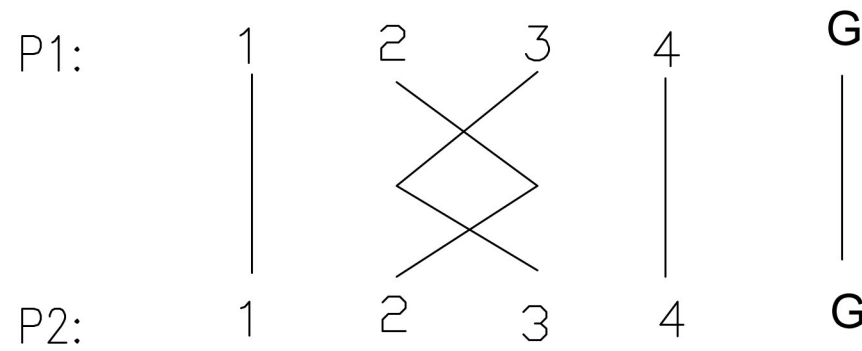

NOTES:

1. 100% OPEN & SHORT TESTING
2. VOLTAGE: 300V DC
3. INSULATION RESISTANCE: 20M ohm
4. CONTACT RESISTANCE :1 ohm

CUSTOMER P/N	length
FE-USB-AA-6IN	6(inch)150MM ± 20MM
FE-USB-AA-01	1.5(FT)450MM ± 30MM
FE-USB-AA-03	3(FT)915MM ± 30MM
FE-USB-AA-06	6(FT)1830MM ± 30MM
FE-USB-AA-10	10(FT)3050MM ± 50MM
FE-USB-AA-15	15(FT)4570MM ± 80MM

8		
7		
6		
5		
4		PE BAG+LABEL
3		PCV45Pa Beige
2		USB2.0 AM
1		USB2.0 cable 28AWG(7/0.12BC)*1P+24AWG(7/0.2BC) *2C+AL+D OD: 4.5mm Beige
NO.	Material	Description

<b>MY CABLE MART, LLC</b>			
Title: <b>USB2.0 CABLE AM TO AM</b>			
Customer: MY CABLE MART LLC		Page: 1/1	Drawn BY: CLR
Customer P/N:		REV: A	Check BY: DYH
Date: 2013.10.07	Drawing NO.: FUAA01	Unit: mm	Appd BY: