



PIN ASSIGNMENT:

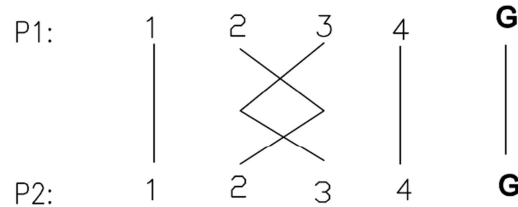

CUSTOMER P/N	length
FE-USB-AB-6IN	6<IN>150MM ± 20MM
FE-USB-AB-10IN	10<IN>250MM ± 20MM
FE-USB-AB-01	1<FT>300MM ± 30MM
FE-USB-AB-02	2<FT>600MM ± 30MM
FE-USB-AB-03	3<FT>915MM ± 30MM
FE-USB-AB-06	6<FT>1830MM ± 30MM
FE-USB-AB-10	10<FT>3050MM ± 50MM
FE-USB-AB-15	15<FT>4570MM ± 50MM

NOTES:

- 1.100%OPEN&SHORT TESTING
- 2.VOLTAGE:300V DC
- 3.INSULATION RESISTANCE:20M ohm
- 4.CONTACT RESISTANCE:1 ohm

8		
7		
6		
5		PE BAG+LABEL
4		PCV45Pa Beige
3		USB2.0 BM
2		USB2.0 AM
1		USB2.0 cable 28AWG(7/0.12BC)*1P+24AWG(7/0.2BC) *2C+AL+D OD:4.5mm Beige
NO.	Material	Description

**My Cable Mart, LLC**

Title: **USB2.0 CABLE AM TO BM**

Customer: MY CABLE MART LLC	Page: 1/1	Drawn BY: <b>CLR</b>
Customer P/N:	REV: <b>A</b>	Check BY: <b>DYH</b>
Date: 2013.10.07	Drawing NO.: FUAB11	Unit: <b>mm</b>
Appd BY:		