

RoHS Compliant

REV.	Revision note	Date	Signature	Checked
1.0	Release to product	18/03/28	NDQ	
2.0	修正客户料号	18/07/09	NDQ	

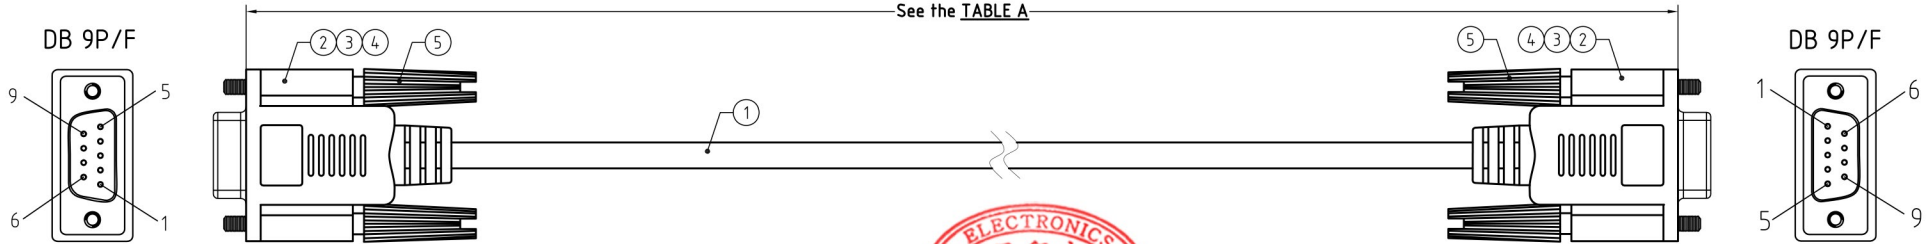


TABLE A

HL料号	成品长度	导通阻抗	客户料号
HC.D9D9FF0130-2023	3ft[915±20]	5 Ohm	HA-9F9F-03
HC.D9D9FF0130-2024	10ft[3050±30]	10 Ohm	HA-9F9F-10
HC.D9D9FF0130-2025	15ft[4575±50]	10 Ohm	HA-9F9F-15
HC.D9D9FF0130-2026	25ft[7625±70]	15 Ohm	HA-9F9F-25


Electrical character:

- 1)100% Open/short/Intermittent testing
- 2)Withstanding voltage:AC/DC 300V AT 10ms.
- 3)Insulation resistance:10M Ohm(min)
- 4)Residual operating current:
 - a.<1.M=0.5mA; b.1.0~2.0M=1.0mA;
 - c.2.0~3.0M=2.0mA; d.3.0~5.0M=3.0mA;
 - e.5.0~10M=5.0mA; f.10~15M=7.0mA;
- 5)Conductive resistance:See the TABLE A

PIN ASSIGNMENT:

DB 9P/F	DB 9P/F
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
SHELL	SHELL

Wire Details

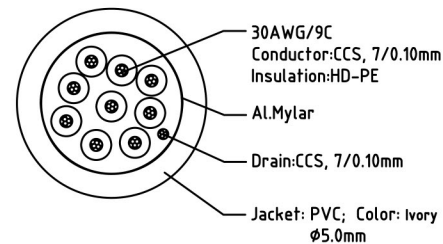

5	Thumbscrew	#4-40UNC,Ø4.0×L37.4mm,Nickel Plated,Molding PVC(Ivory)	-----	
4	Overmold	PVC,45Pa,Ivory	-----	
3	Innermold	PE,Low density	-----	
2	DB_Conn	DB 9P/F,PIN G/F,Blue Insulation,Steel-Shell(Nickel Plated),Solder type	-----	
1	Cable	30#(7/0.10CCS)×9C-D+A+PVC,Ivory,ØD5.0mm	-----	
NO.	PART NAME	SPEC DESCRIPTION	PART P/N	REMARK

Mould number:	Customer: M018UA	Customer P/N: See the TABLE A	Article No./ HL-GC-001			
Packing file:	Designed by: NDQ	Checked by:	Approved by:	File number: D-2023~2026	Date: 18/07/09	
	MY CABLE MART, LLC			Name: DB9 Female to Female Serial Cable	Scale: none	Unit: mm
This drawing contains information that is proprietary to Hallink Electronics Limited incorporated and should not be used without written permission				P/N: HC.D9D9FF0130-2023~2026	Edition: 2.0	Sheet: 1/2