

RoHS Compliant

REV.	Revision note	Date	Signature	Checked
1.0	Release to product	16/5/20	Pillar	

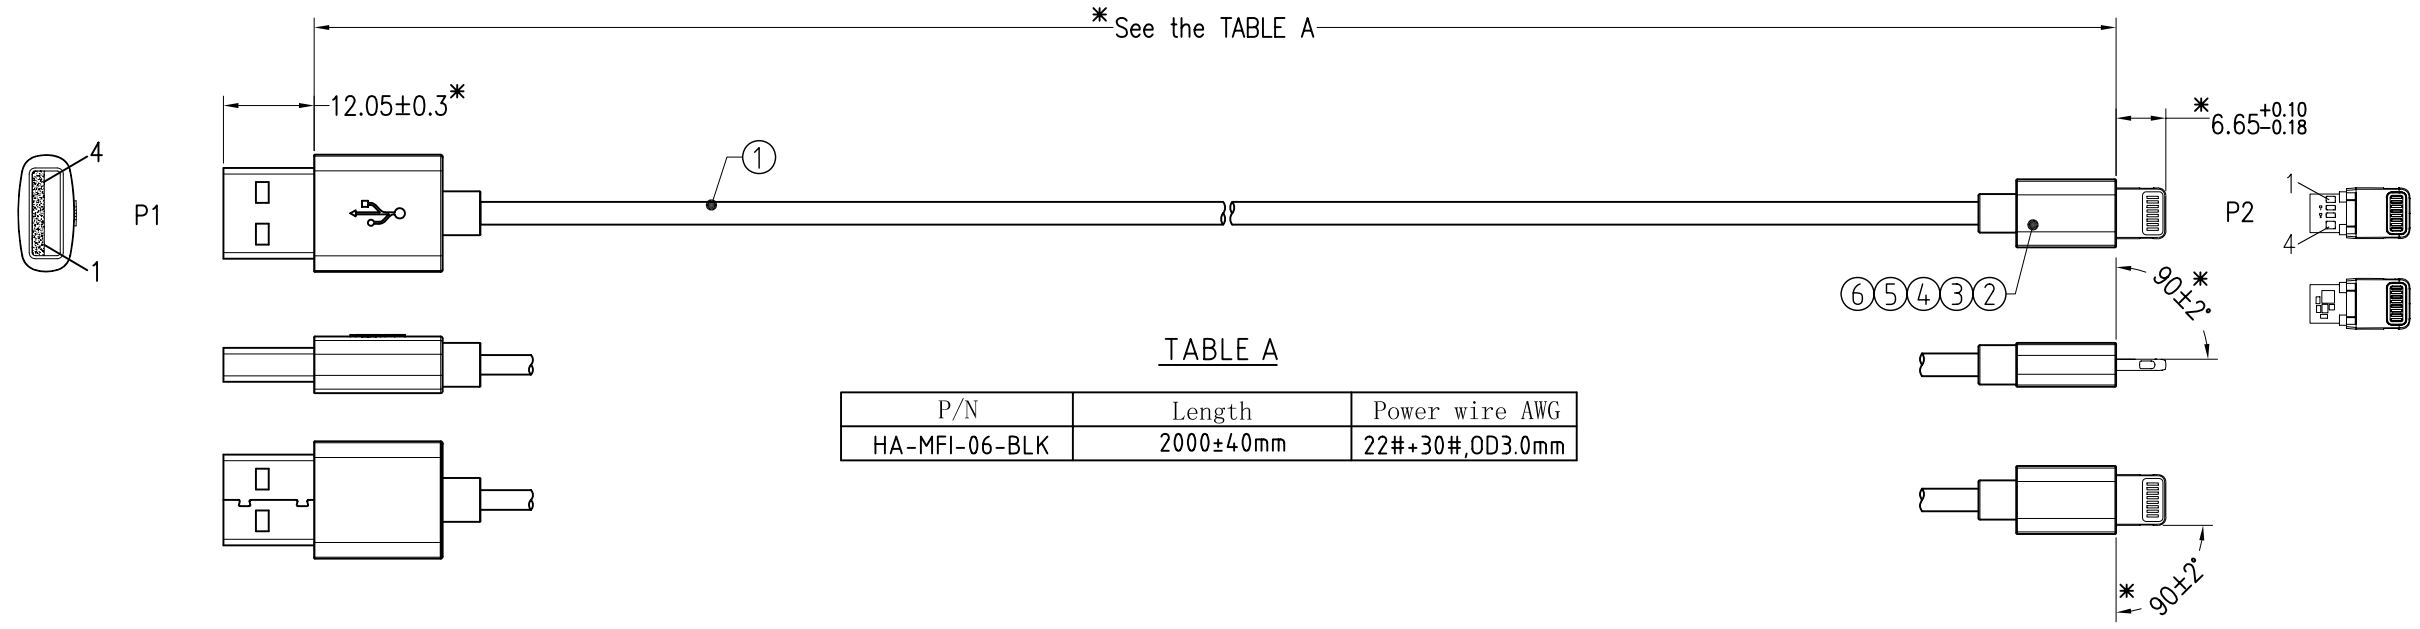


TABLE A

P/N	Length	Power wire AWG
HA-MFI-06-BLK	2000±40mm	22#+30#,OD3.0mm

PIN OUT

P1		P2	
1	Red	4	VCC
2	White	2	D+
3	Green	3	D-
4	Black	1	GND
S		S	SHIELD

6	Overmold	TPE,85A,black	-----	
5	Innermold	LDPE	-----	
4	Shell	C48 Shell,SUS304,L8.9mm×T0.3mm	-----	
3	Adhesive	UV adhesive	-----	
2	Conn	Lightning C48,PIN goldplated 15u",white insulation,with PCBA,Shell-steel NI plated	-----	
1	Cable	USB AM to Open,black TPE jacket,Connector Shell-steel NI plated	-----	
NO.	PART NAME	SPEC DESCRIPTION	PART P/N	REMARK

Mould number:	Customer: -	Customer P/N: -	Article No./ HL-GC-001	
Packing file:	Designed by: Pillar	Checked by:	Approved by	File number: -
	My Cable Mart			Date: 17/02/24
Name: USB 2.0 A/M to Lightning Cable				
			Scale: none	Unit: mm
			P/N: HA-MFI-06-BLK	Sheet: 1/2
			Edition: 1.0	