

REV.	Revision note	Date	Signature	Checked
1.0	Release to product	15/12/10	Pillar	

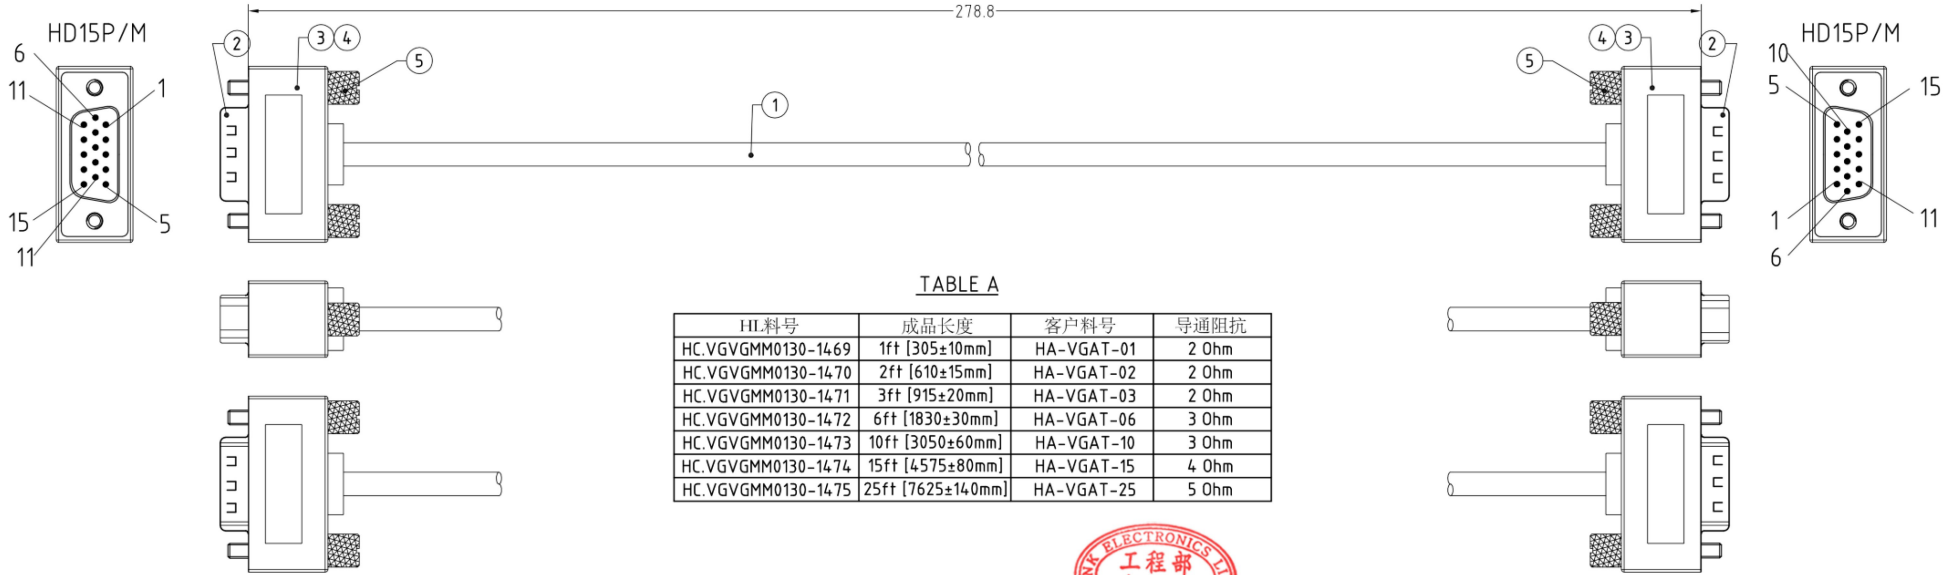


TABLE A


HL料号	成品长度	客户料号	导通阻抗
HC.VGVGMM0130-1469	1ft [305±10mm]	HA-VGAT-01	2 Ohm
HC.VGVGMM0130-1470	2ft [610±15mm]	HA-VGAT-02	2 Ohm
HC.VGVGMM0130-1471	3ft [915±20mm]	HA-VGAT-03	2 Ohm
HC.VGVGMM0130-1472	6ft [1830±30mm]	HA-VGAT-06	3 Ohm
HC.VGVGMM0130-1473	10ft [3050±60mm]	HA-VGAT-10	3 Ohm
HC.VGVGMM0130-1474	15ft [4575±80mm]	HA-VGAT-15	4 Ohm
HC.VGVGMM0130-1475	25ft [7625±140mm]	HA-VGAT-25	5 Ohm




**Electrical character:**

- 1)100% Open/short/Intermittent testing
- 2)Withstanding voltage:DC 300V AT 10ms.
- 3)Insulation resistance:10M Ohm(min)
- 4)Residual operating current:
  - a.<1M=0.5mA; b.1.0~2.0M=1.0mA;
  - c.2.0~3.0M=2.0mA; d.3.0~5.0M=3.0mA;
  - e.5.0~10M=5.0mA; f.10~15M=7.0mA;
- 5)Conductive resistance: See the TABLE A

**Wire Details**

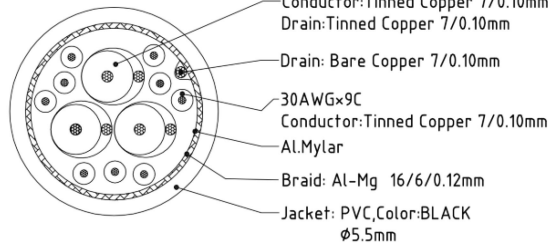

**PIN ASSIGNMENT:**

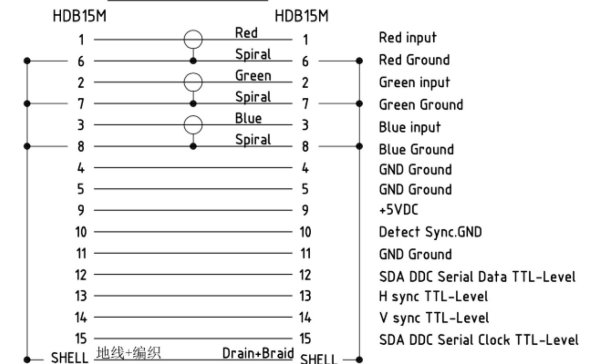

NO.	PART NAME	SPEC DESCRIPTION	PART P/N	REMARK
5	Screw	Tumbscrew #4-40 2.0×25.7 Gold-plated	----	
4	Overmold	PVC 45Pa Black	----	
3	Innermold	PE Low density	----	
2	Conn	HD15P:Male,PIN G/F,Insulation:Blue,Shell:G/F	----	
1	Cable	VGA3+9 [30#(7/0.10TC)+FM-PE+D(7/0.10TC)+AL]×3+30#(7/0.10TC)/9C+A+D(7/0.10BC)+B(16/6/0.12mm,Al-Mg)+PVC,OD:5.5mm,Black	----	

Mould number:	Customer: M018UA	Customer P/N:	See table A	Article No./ HL-GC-001				
	Designed by: Pillar	Checked by:	Approved by	File number: D-1469-1475	Date: 15/12/10	Scale: none	Unit: mm	
	My Cable Mart, LLC			Name: VGA 3+9 M TO M CABLE				
Packing file:	This drawing contains information that is proprietary to Hailink Electronics Limited incorporated and should not be used without written permission			P/N: HC.VGVGMM0130-1469-1475	Edition: 1.0	Sheet: 1/3 A3		