


| | | | | |
|----------------|----------|-----|-------|----------|
| ROHS Compliant | | REV | NOTES | DATE |
| A | RELEASED | | | 2006/6/7 |

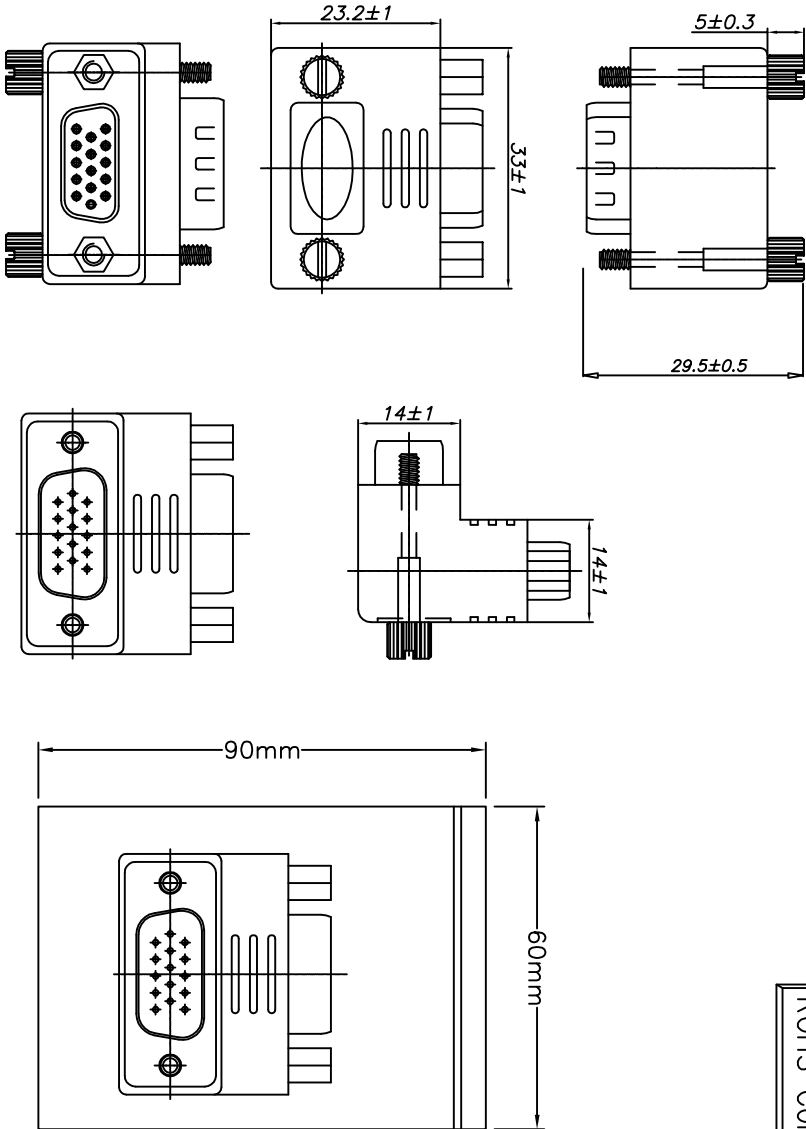

WIRE LIST:

| P1 | P2 |
|----|----|
| 1 | 1 |
| 2 | 2 |
| 3 | 3 |
| 4 | 4 |
| 5 | 5 |
| 6 | 6 |
| 7 | 7 |
| 8 | 8 |
| 9 | 9 |
| 10 | 10 |
| 11 | 11 |
| 12 | 12 |
| 13 | 13 |
| 14 | 14 |
| 15 | 15 |

SHELL _____ SHELL

ELECTRONIC TEST CONDITION:
 100% OPEN SHORT & MISWIRE TEST.
 CONDUCTIVE RESISTANCE:3Ω/MAX
 INSULATION RESISTANCE:5MΩ/MIN,AT DC 300V

| ITEM | NAME | DESCRIPTION | Q'TY |
|------|--------|--|---------|
| ① | PE BAG | 60*90*0.06mm | 1PCS |
| ② | CABLE | HOOK UP WIRE:UL1007 28AWG*1C TINNED COPPER WIRE, INSULATION:RED PVC L=30±1mm. | 15PCS |
| ③ | CONN. | HDB15 MALE CONNECTOR SOLDER TYPE CONTACT NICKLE FLASH INSULATOR:BLUE FRONT BACK TIN PLATED WHITE SHELL | 1PCS |
| ④ | CONN. | TIN PLATED SHELL, INSULATOR (RED, GREEN, BLUE SEPARATE ONE). | 1PCS |
| ⑤ | SCREW | Screw #4-40UNC, Ø2.8*28.0mm NICKLE PLATED | 2PCS |
| ⑥ | PVC | MOLDED 45P PVC BLACK | 0.020KG |

| | |
|------------|----------|
| 单位(UNITS) | mm |
| 数量(Q'TY) | N/A |
| 材料(M'T'L) | SEE NOTE |
| 处理(FINISH) | SEE NOTE |
| 绘图(DRAW) | |
| 设计(DE'N) | |
| 审核(CH'K) | |
| 核准(APP'D) | |

| | |
|--------------------|-----------------------------|
| 图名(NAME) | VGA15MALE TO VGA15FEMALE90度 |
| 料号(PART NUMBER) | SZ-0606-1 |
| 图号(DRAW NUMBER) | RASCO0902 |
| 图档(FILE NAME .DWG) | E:GCT/A/SC/09 |
| 比例(Scale) | 1/1 |
| 图纸(SIZE) | A4 |
| 页次(Sheet) | 1 |
| 版本(Rev) | C |