

RoHS Compliant

REV.	Revision note	Date	Signature	Checked
1.0	Release to product	13/04/11	Pillar	



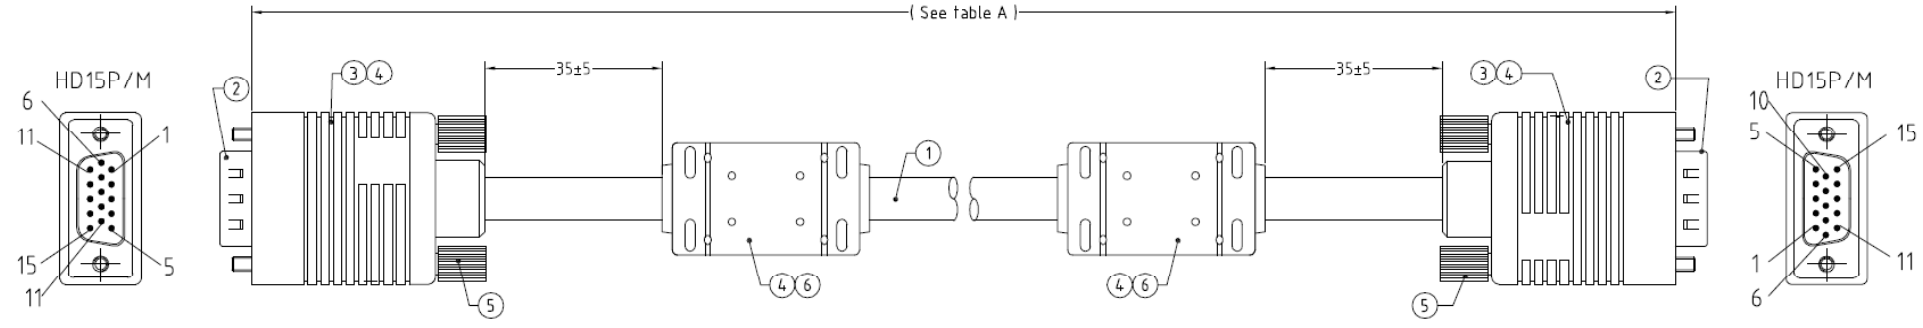


TABLE A

HL P/N	LENGTH	Customer P/N	Conductive resistance
HC.VGVGMM0128-0785	35ft [10675±200mm]	HA-VGA-35F	6 Ohm
HC.VGVGMM0128-0786	40ft [12200±200mm]	HA-VGA-40F	6 Ohm
HC.VGVGMM0128-0787	50ft [15250±300mm]	HA-VGA-50F	8 Ohm
HC.VGVGMM0128-0788	75ft [22875±400mm]	HA-VGA-75F	10 Ohm
HC.VGVGMM0128-0789	100ft [30500±500mm]	HA-VGA-100F	15 Ohm
HC.VGVGMM0128-0790	150ft [45750±600mm]	HA-VGA-150F	20 Ohm
HC.VGVGMM0128-0791	200ft [61000±800mm]	HA-VGA-200F	25 Ohm

**Electrical character:**  
 1)100% Open/short/Intermittent testing  
 2)Withstanding voltage:DC 300V AT 10ms.  
 3)Insulation resistance:10M Ohm(min)  
 4)Residual operating current:  
 a.<1M=0.5mA; b.1.0~2.0M=1.0mA;  
 c.2.0~3.0M=2.0mA; d.3.0~5.0M=3.0mA;  
 e.5.0~10M=5.0mA; f.10~15M=7.0mA;  
 5)Conductive resistance: See the TABLE A

Wire Details(Scale 5:1)

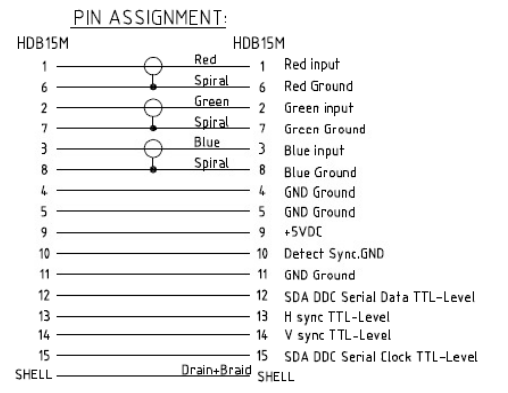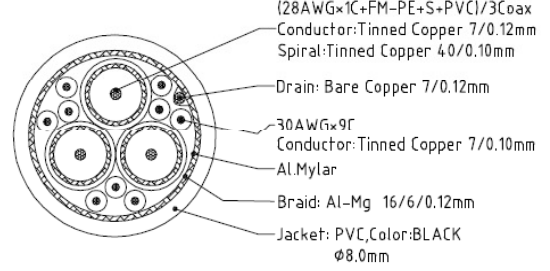

6	Fe-core	17.5(OD)×10(ID)×28.0(L)mm	----	
5	Screw	Tumbscrew 2.3×44 Nickel-plated, Black PVC, 35Pa	----	
4	Overmold	PVC 60Pa Black UL94V-0	----	
3	Innermold	PE Low density	----	
2	Conn	HD15P-Male,PIN G/F,Insulation:Blue,Shell:G/F	----	
1	Cable	VGA3+9 [28#(17/0.12TC)+FM-PE+S(4/0.10TC)+PVC]×3Coax+30#(7/0.10TC)/9C+A+D(7/0.12BC)+B(16/6/0.12mm,Al-Mg)+PVC,OD:8.0mm,Black	----	
NO.	PART NAME	SPEC DESCRIPTION	PART P/N	REMARK

Mould number:	Customer: M018UA	Customer P/N:	See table A	Article No./ HL-GC-001	
	Designed by: Pillar	Checked by:	Approved by:	File number: D-0785-791	Date: 13/04/11
	<b>My Cable Mart LLC</b>			Name: VGA3+9 M TO M CABLE	Scale: 1:1
<b>Packing file:</b>	This drawing contains information that is proprietary to Halink Electronics Limited incorporated and should not be used without written permission			P/N: HC.VGVGMM0128-0785-791	Edition: 1.0
					Sheet: 1/3 A3