
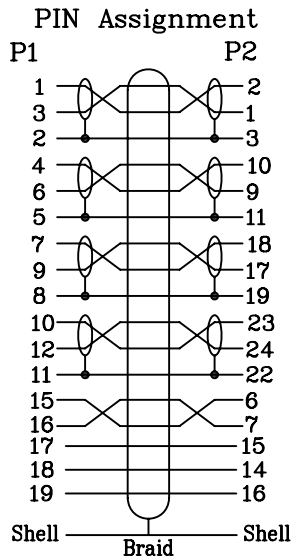


**High Speed HDMI™ Cable with Ethernet E358026 AWM STYLE 20276 80°C 30V VW-1**

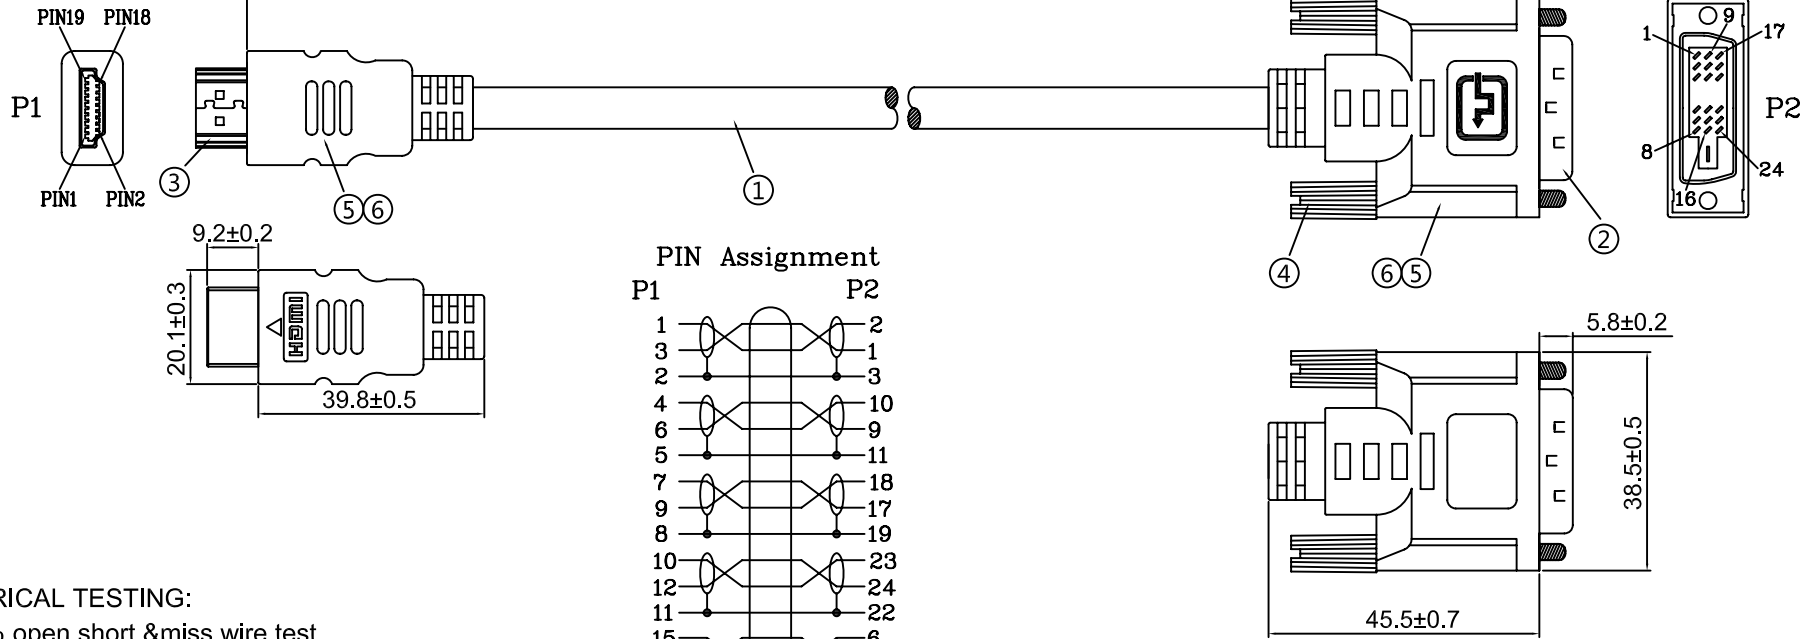

- ELECTRICAL TESTING:**
- (1)100% open short &miss wire test.
  - (2)Insulation Resistance:  $\geq 5M \Omega$ .
  - (3)Contact Resistance:  $5 \Omega$ .
  - (4)Dielectric Strength:DC 300V/0.1s.
  - (5)HDTV-DVD(1080P):100%.Testing Line Process.

Client NO	GC-HD-20	GC-HD-25-8
Length	6100±50mm(20FT)	7620±50mm(25FT)

⑥	OUTER MOLDED	45P Black PVC	g	12	
⑤	INNER MOLDED	PE	g	8	
④	SCREW	DVI Screw,Nickel Plater, L43.2*USA4-40/Φ2.8	PCS	2	
③	CON	HDMI AM Gold Plated Connector	PCS	1	
②	CON	DVI 18+1 Gold Plated Connector	PCS	1	
①	CABLE	[(28AWG+FPE)*1P+D+AL-foil]*5P+(28AWG+HDPE)*4C+AEB+Black PVC OD7.3mm	PC	1	
NO.	ITEM	DESCRIPTION	UNIT	Q'TY	Notes

		<b>MY CABLE MART LLC</b>			
X.±0.20					
.X±0.15					
.XX±0.10					
REV	A/O	Title		Draw	Song
Scale	/	Customer	HDMI AM-DVI 18+1 M	1-39	Checked
Page	1/1	Item No.	-	Sales	
Unit	mm	Date	2021/06/07	Approval	