

RoHS Compliant

REV.	Revision note	Date	Signature	Checked
1.0	Release to product	20/11/24	Darrick	



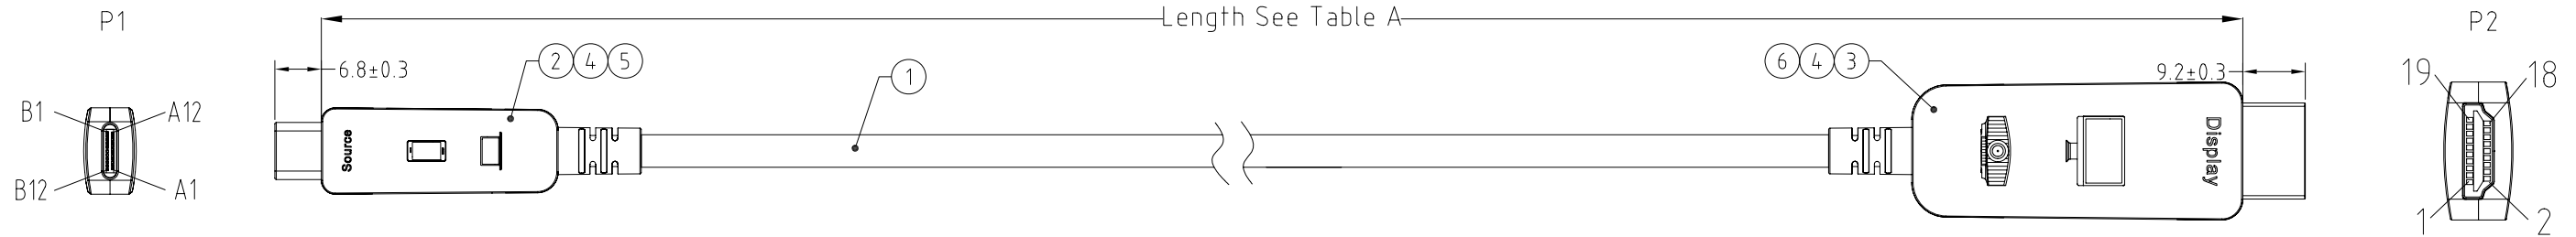


Table A

P/N	Length	Customer P/N
HC.USHD-2401	15ft [4572±100mm]	HA-CHFO-15
HC.USHD-2402	20ft [6096±120mm]	HA-CHFO-20
HC.USHD-2403	30ft [9144±200mm]	HA-CHFO-30
HC.USHD-2404	50ft [15240±300mm]	HA-CHFO-50
HC.USHD-2405	65ft [19812±300mm]	HA-CHFO-65
HC.USHD-2406	82ft [24994±300mm]	HA-CHFO-82
HC.USHD-2407	100ft [30480±300mm]	HA-CHFO-100

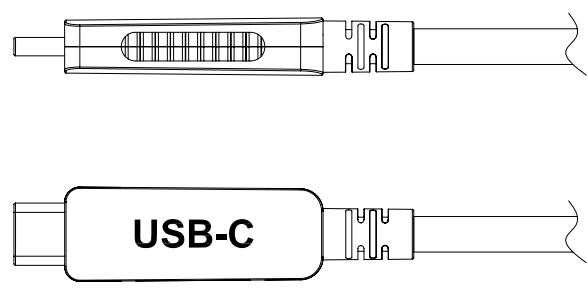

Pin Assignment

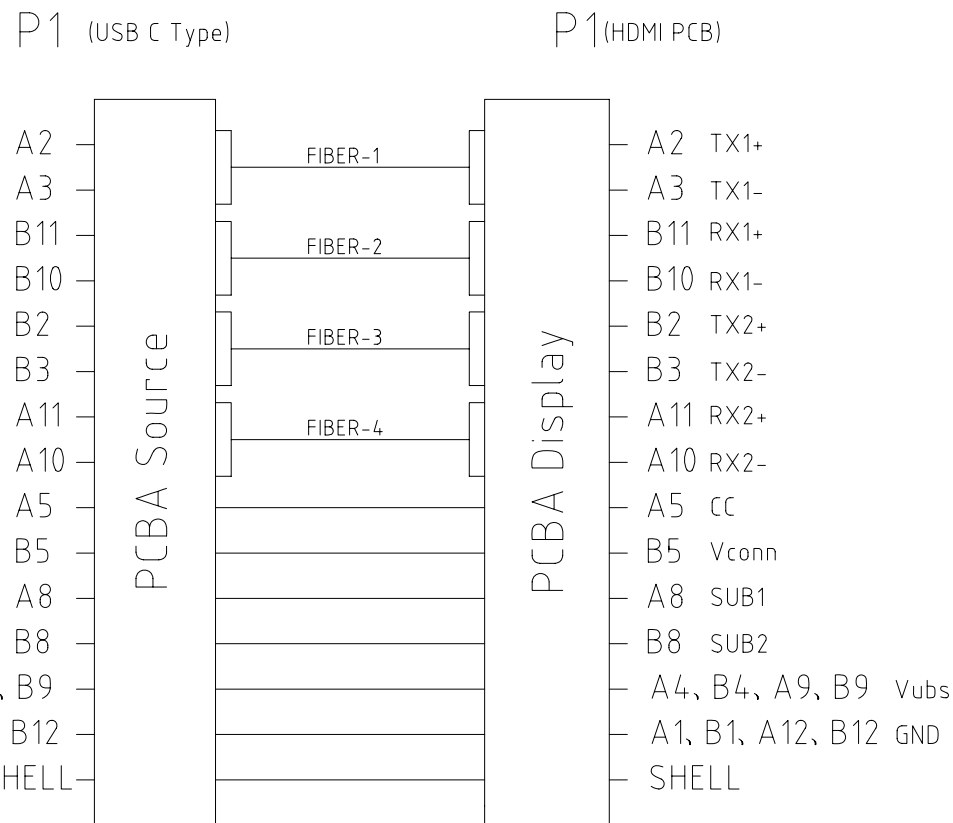

Function Test: By Notebook computer and TV test pass
Supports 4Kx2K/60Hz

NO.	PART NAME	SPEC DESCRIPTION	PART P/N	REMARK
6	Shell	HDMI A type Zinc alloy shell,Black		
5	Shell	USB C type Zinc alloy shell,Black		
4	Overmold	PVC 45Pa Black UL94V-0		
3	Conn+PCBA	HDMI type A/M PIN:G/F SHELL:G/F Insulator:Blue+PCBA(RX) Display		
2	Conn+PCBA	USB type C/M PIN:G/F SHELL:IN Insulator:Black+PCBA(TX) Source		
1	Cable	Optical Fiber(OM3)+(30AWGx1P+D+AL)+30AWGx1C+20AWGx2C+F+AL OD:4.7 Jack:Black TPE		

Mould number:	Customer: M018UA	Customer P/N: See Table A	Article No./ HL-GC-001	
	Designed by: Darrick	Checked by:	Approved by	File number: D-2401~2407
				Date: 20/11/24
				Scale: none
				Unit: mm
Packing file:	My Cable Mart			Name: HDMI Active optical cable
				P/N: HC.USHD-2401~2407
				Edition: 1.0
				Sheet: 1/2 A3