


RG6 QUAD Shield CMR CATV 75 Ω Coaxial Cable

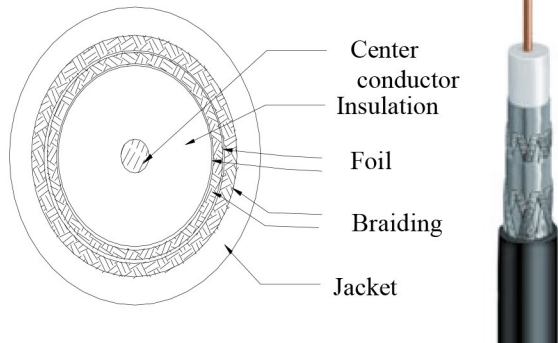

Electrical Performance			
Frequency (MHz)	Attenuation (dB/100m)	Frequency (MHz)	Attenuation (dB/100m)
1	0.89	1000	22.00
10	2.90	1200	24.60
50	5.25	1450	27.20
100	7.20	1800	30.50
200	9.84	2200	32.80
400	14.10	2400	32.83
700	19.00	3000	37.88
900	21.00		

Description

RG-6/U QUAD CMR CATV 75 Ω Coaxial Cable

Applicable Standards

Reference Standard

SCTE IPS-SP-001
UL 1655, UL 13, UL 444, ROHS

Physical Characteristics

Conductor		C.C.S.
AWG		18
Diameter	(inches)	0.04
Insulation		Skin Foamed PE
Nom. Thickness	(inches)	0.073
Insulation Diameter	(inches)	0.186
First Braid Shield		Aluminum
Coverage Area	(%)	60
Second Braid Shield		Aluminum
Coverage Area	(%)	40
Jacket		FR-PVC
Cable Diameter	(inches)	0.2968
Nom. Thickness	(inches)	0.0255
Nominal Weight	500'	18 lbs.
	1000' (Pullbox & Reel)	35 lbs.

Cable Marking

RG6/U QUAD SHIELD 18AWG CMR FT4 XXXXXX VERIFIED TO C(ETL)US CATV SWEPT TO 3.0 GHZ ****FT

Electrical Characteristics

Temperature Rating	(°C)	-20 to 60
Impedence	(± 3.0 Ohms)	75
Capacitance	(pF/ft)	15.5
Conductor DCR@20° C	(ohms/1000ft)	28.6
Velocity of Propagation	(%)	84
ROHS Compliant		Yes

Part Numbers

Part Numbers	Color	Put-up	
RG6QRBK1-500	Black	500'	Pullbox
RG6QRBK1	Black	1,000'	Pullbox
RG6QRBK2	Black	1,000'	Reel
RG6QRWH1-500	White	500'	Pullbox
RG6QRWH1	White	1,000'	Pullbox
RG6QRWH2	White	1,000'	Reel